

SW150 Standard Wax

Economical Printing with Consistent Performance



Food/Beverage



Health/Beauty



Logistics



Retail

Benefits

- Handles basic applications with ease
- Reliable, economical wax ink
- Good print quality on low end paper tag and label stocks
- High wax content allows for lower printer darkness settings
- Print speeds up to 12 IPS
- Specially formulated backcoat protects the printhead

Recommended Stocks

Paper

- Vellum
- Matte Coated
- Semi-Gloss
- Gloss
- Floodcoats

Applications

- Component identification
- Product identification
- Shipping
- Warehousing
- Work in Process (WIP)

Key Product Range

STANDARD WAX	ENHANCED WAX	WAX RESIN	RESIN	NEAR EDGE
SW150 SW200	GP725 DC100	PM255 PM308 DC200	SP330 SP575 DC400	NETMark IQ NETFlex+ NETFlex+ XL NET330 NETColour

Technical Specifications

Colour Code Tab Yellow
 Film Thickness 4.5 Microns
 Total Ribbon Thickness 7.5 Microns
 Transmission Density 1.73 MacBeth Scale
 Ink Melting Point 67°C / 152°F

Imaging Characteristics

Printhead Flathead
 Max Print Speed 12 IPS (305 mm/s)
 Image Darkness 1.3 RD (densitometer)


Compliance

- REACH – SVHC Free
- RoHS
- FDA GRAS Recognized
- FDA 21CFR175
- ISEGA

Storage Conditions

12 months recommended
 20-85% Relative Humidity Rate, -5-40°C (23-104°F)

Performance Ratings

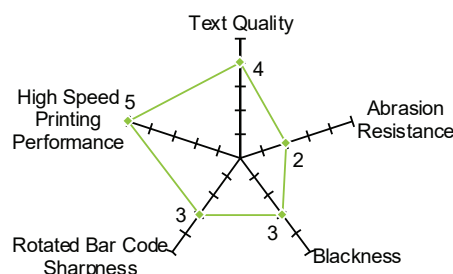

Liesdonk 5b • 2440 Geel, Belgium
 Tel: +32 14 579800 • sales@iimak.be • www.iimak.eu