

GP725 Resin Enhanced Wax

High Performance Wax Thermal Transfer Ribbon



Food/Beverage



Health/Beauty



Logistics



Retail



The printhead cleaner *built in* your ribbon.

Benefits

- Easy to use, no printer adjustments
- Dark images with solid fill and no show-through
- Prints on a wide range of tag and label stocks
- High speed printing for high efficiency
- Sharp text and lines for highly readable barcodes
- Resin-enhanced provides good scratch and smudge resistance
- Anti-static formula and unique backcoat protects the printhead
- Clean Start® built-in printhead cleaner maintains print quality

Recommended Stocks

Paper

- Vellum
- Matte Coated
- Semi-Gloss
- Gloss
- Floodcoats

Synthetics

- PP / Polypropylene
- PE / Polyethylene
- Polyolefin (e.g. Tyvek)

Applications

- Autotag
- Compliance labelling
- Component identification
- Hang tags
- Ingredient lists
- Prepared foods
- Prime label
- Product identification
- Shipping
- Warehousing
- Work in Process (WIP)

Key Product Range

STANDARD WAX	ENHANCED WAX	WAX RESIN	RESIN	NEAR EDGE
SW150 SW200	GP725 DC100	PM255 PM308 DC200	SP330 SP575 DC400	NETMark IQ NETFlex+ NETFlex+ XL NET330 NETColour

Technical Specifications

Colour Code Tab Clear
 Film Thickness 4.5 Microns
 Total Ribbon Thickness 8.6 Microns
 Transmission Density 2.7 MacBeth Scale
 Ink Melting Point 65°C / 149°F

Imaging Characteristics

Printhead Flathead
 Max Print Speed 14 IPS (355 mm/s)
 Image Darkness 1.9 RD (densitometer)


Compliance

- REACH – SVHC Free
- RoHS
- FDA GRAS Recognized
- FDA 21CFR175
- ISEGA

Storage Conditions

12 months recommended
 20-85% Relative Humidity Rate, -5-40°C (23-104°F)

Performance Ratings

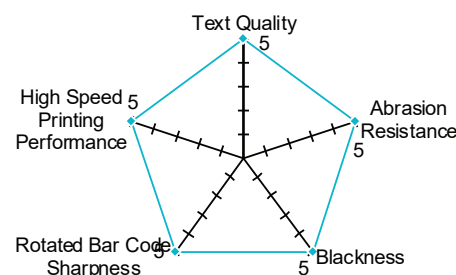

Liesdonk 5b • 2440 Geel, Belgium
 Tel: +32 14 579800 • sales@iimak.be • www.iimak.eu