

NET330 Near Edge Resin

High Durability for Flexible Packaging



Food/Beverage



Health/Beauty



Medical



Pharmaceutical



Retail

Benefits

- High performance in Markem, Videojet, ICE and other TTO Printers
- Easy to use - No printer adjustments needed for most print formats
- Doesn't smear or rub off in the packaging process, even with hot fill
- No image ghosting - heat resistance up to 260°C required for lid sealing
- Withstands water and oils associated food production
- Withstands chemicals like isopropyl alcohol, bleach, and more
- Anti-static formula and unique backcoat protects the printhead

Recommended Stocks

Flexible Packaging Films

- PP / Polypropylene
- PE / Polyethylene
- PET / Polyester

Applications

- Bakery foods
- Coffee
- Flexible packaging
- Frozen meats/meals
- Frozen vegetables
- Hot fill
- Meat, poultry, seafood
- Nuts
- Prepared Foods
- Pet Food and Treats
- Tray Lids
- Medical Devices
- Pharmaceutical
- Pill packs

Key Product Range

STANDARD WAX	ENHANCED WAX	WAX RESIN	RESIN	NEAR EDGE
SW150 SW200	GP725 DC100	PM255 PM308 DC200	SP330 SP575 DC400	NETMark IQ NETFlex+ NETFlex+ XL NET330 NETColour

Technical Specifications

Colour Code Tab Metallic Blue
 Film Thickness 4 Microns
 Total Ribbon Thickness 6.3 Microns
 Transmission Density 1.0 MacBeth Scale
 Ink Melting Point 150°C / 302°F

Imaging Characteristics

Printhead Near Edge
 Max Print Speed 16 IPS (406 mm/s)
 Image Darkness 2.0 RD (densitometer)
 Heat Resistance 260°C / 500°F


Compliance

- REACH – SVHC Free
- RoHS
- FDA 21CFR175
- ISEGA

Storage Conditions

12 months recommended
 20-85% Relative Humidity Rate, -5-40°C (23-104°F)

Performance Ratings

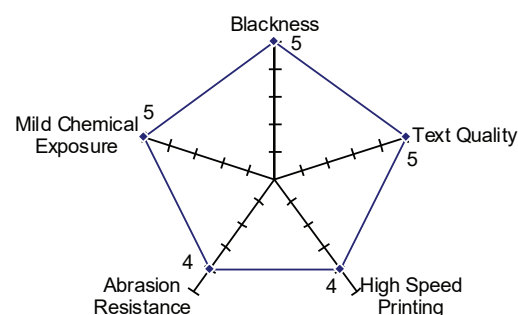

Liesdonk 5b • 2440 Geel, Belgium
 Tel: +32 14 579800 • sales@iimak.be • www.iimak.eu